



- 铸铁热交换器
- 锅炉易于现场转换为左侧管道内置后吸风分流器, 以适应低空间控件位于保温套内, 易于从锅炉
- 正面操控。
- 从 38 到 280 MBH 的八种尺寸有限终身保修

# ARUBA 4

## 燃气热水锅炉

专为可靠性、效率和性能而设计。适用于具有认证烟囱的住宅和小型商业应用。

### 集成化锅炉控制

温度控制、继电器和点火功能都集中在单个模块中。包括用于第二加热区或间接热水器（如 Mega-StorII®）的附加循环器输出。

### 可用的升级选项


- 24 伏低水位切断
- 对接站可接受下列插入模块：
  - 低水位切断
  - 室外温度复位
  - 冗余上限
- 触控屏显示



Quality  
Value &  
Service

# AWR SERIES - ARUBA 4

## TECHNICAL SPECIFICATIONS

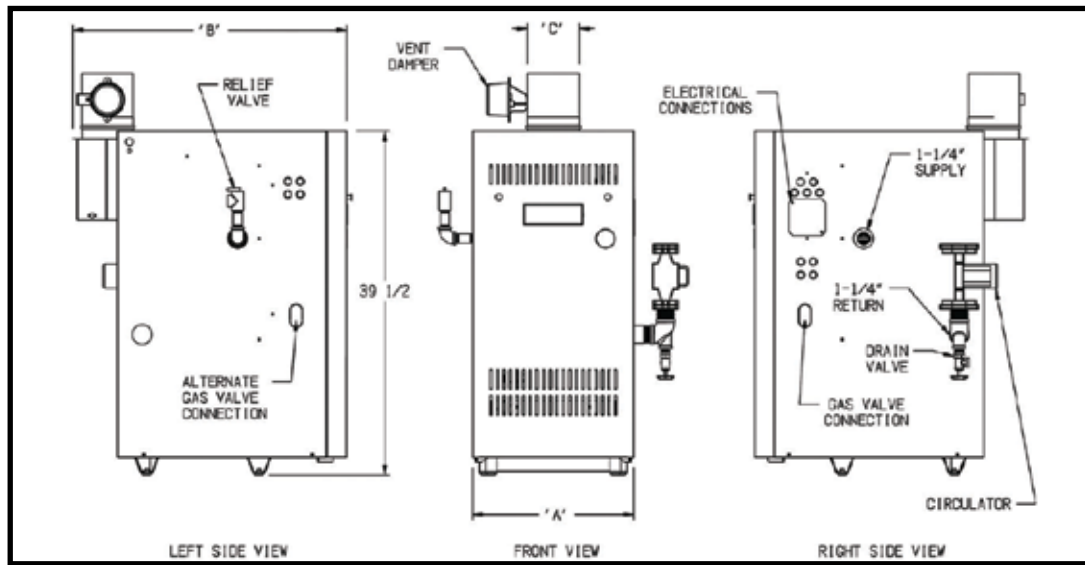

CROWN MODEL NUMBER	NO. OF SECTIONS	NATURAL AND LP GAS				DIMENSIONS (IN.)			SHIPPING WEIGHT (LBS.)
		INPUT (MBH)	HEATING CAPACITY (MBH)	AHRI NET RATING WATER (MBH)	AFUE (%)	'A'	'B'	'C'	
AWR038	2	38	32	28	83.0	9-3/4	31-1/2	4	234
AWR070	3	70	58	50	83.5	12-7/8	31-1/2	4	284
AWR105	4	105	87	76	83.7	15-3/8	31-1/2	5	334
AWR140	5	140	117	102	83.6	18-1/2	31-1/2	6	384
AWR175	6	175	146	127	83.5	21-1/2	31-3/4	7	434
AWR210	7	210	175	152	83.4	24-5/8	33-1/2	7	484
AWR245	8	245	205	178	83.4	27-5/8	33-1/2	8	533
AWR280	9	280	234	203	83.3	30-3/4	33-1/2	8	583

- Altitudes above 2,000 ft. - ratings should be reduced at a rate of 4% for each 1,000 ft. above sea level (US only)
- The Net I=B=R Water Ratings are based on a piping and pickup allowance of 1.15.
- The manufacturer should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.

All residential cast iron boilers include a full one year **Additional Features/Benefits**

- Available with natural or LP gas
- Designed for installation on combustible floors
- Stack Damper; Rollout Switch; Blocked Vent Switch; ASME relief valve (30 PSI)
- Stainless steel burners



The Mega-Stor II® indirect water heater utilizes the energy created by your boiler to produce abundant hot water for your home. Mega-Stor II water heaters come in a variety of sizes from 26 to 119 gallons to meet a variety of residential and commercial needs. A Horizontal model is also available in 40 and 53 gallon sizes, as well as a Solar model in 79 and 119 gallon sizes.

Specifications are subject to change without notice.

