




- Up to 96% AFUE
- 10:1 Turndown ratio
- Advanced Honeywell SOLA control with ergonomic touch screen display
- Five sizes 85, 110, 155, 205 & 270 MBH
- 5 year parts warranty
- Field convertible to LP Gas with optional kit
- Field adjustable for high altitude
- Universal vent connection
- Outdoor reset and sensor
- Versatile top and bottom supply and return connections
- Low NOx meets South Coast Rule 1146.2 requirements
- Compatible with "PatConnect" (requires app and optional bluetooth adapter)



High Efficiency, Gas Fired, Stainless Steel, Fire Tube Design, Condensing, Heating and Combi Boiler

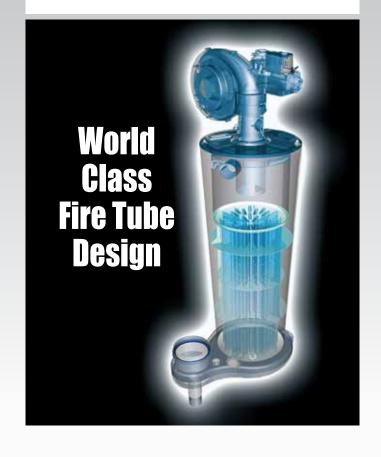





TECHNICAL SPECIFICATIONS

Typical Venting Configurations (Horizontal and Vertical)

Illustrations are for representation only. For complete venting information, please see installation manual.





Horizontal 2-pipe

Vertical 2-pipe





Horizontal 2-pipe low profile

Vertical 2-pipe concentric






Horizontal 2-pipe concentric

Hybrid

Vertical exhaust/ sealed B-vent for combustion air.



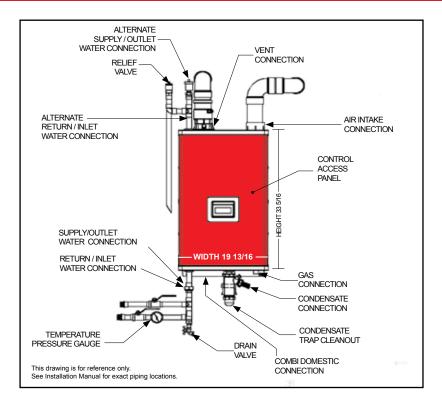

MODEL	AFUE%	Input (MBH) min-max	DOE Heating Capacity (MBH)	NET AHRI (MBH)	MAWP (PSI)	Vent Size (in.)	Approx Shipping Weight (lbs.)	Depth (Inches)
RPTR085HB	96.0*	8.5-85	79	69	30	2 or 3	140	20
RPTR110HB	96.0*	11-110	103	90	30	2 or 3	145	20
RPTR155HB	95.0*	15.5-155	145	126	30	3	160	20
RPTR205HB	95.0*	20.5-205	189	164	80	3	175	21
RPTR270HB	95.0*	27-270	252	219	80	3	185	21

*ENERGY STAR® certified product

- 1. Boilers shipped set for natural gas. Above performance is for elevations up to 2000'. Consult manual for instructions and performance for installations up to 10,000'.
- 2. The Net AHRI Water Ratings shown are based on a piping and pickup allowance of 1.15.
- 2. The manufacturer should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.

ADDITIONAL FEATURES AND EQUIPMENT

- · Easy Access control panel
- Split voltage junction box with fused connection boards
- · LWCO ready with NPT connection
- · Pre-installed hanging bracket and wall mount kit
- Sola Control System
 - LCD touch screen display
 - Built-in self diagnostics
 - Three circulator outputs
 - Built-in sequencer stages up to 8 boilers
- Domestic Hot Water priority
- Warm weather shutdown
- Password security

OPTIONAL EQUIPMENT

- Zone Panel
- LWCO kit
- · Wireless outdoor sensor
- Service parts repair kit
- · CPVC/PVC Vent Kit
- · LP Conversion Kit
- Floor Stand kit









