



BERMUDA

燃气蒸汽锅炉

专为可靠性、效率和性能而设计。
适用于具有认证烟囱的住宅和小型
商业应用。



BSI 近锅炉管道套件包旨在节省时间和金钱。近锅炉管道套件包将有助于将“干”蒸汽输送到加热系统，减少短循环，消除水锤现象，并防止系统淹没。套件包包括安装手册中建议的完成近锅炉管道连接所需的所有组件。




- 铸铁热交换器
不锈钢燃烧器
- 内置后吸风分流器, 以适应低空间
带有自动排气风门
型号 BSI069 至 BSI276
- 高颜值, 坚固的保温套
- 完全组装好的成品或作为散装套件
从69 到 379 MBH 的十种尺寸
- 专为安装在易燃地板上而设计

Quality
Value &
Service

BSI SERIES - BERMUDA

TECHNICAL SPECIFICATIONS

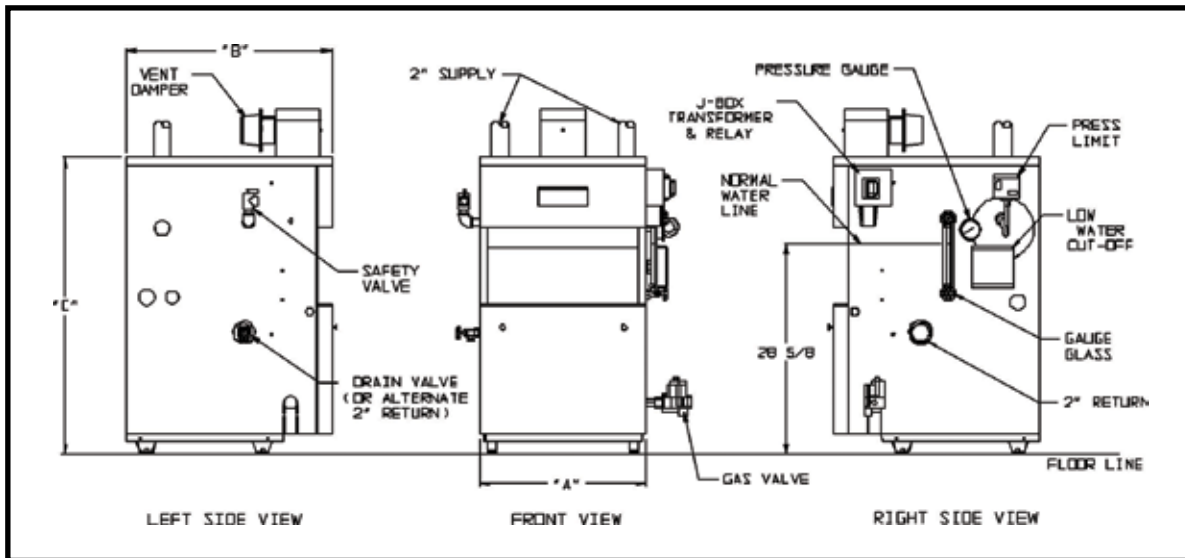

CROWN MODEL NUMBER	NO. OF SECS	NATURAL OR LP GAS				AFUE %	APPROX. SHIPPING WEIGHT (PKG)	DIMENSIONS (INCHES)			
		INPUT (MBH)	HEATING CAPACITY (MBH)	AHRI NET RATING (STEAM)				A	B	C	FLUE COLLAR DIAMETER
				SQ. FT.	MBH						
BSI069	3	69	57	179	43	81.9	354	12-3/4	28	40-7/16	4
BSI103	4	103	85	267	64	82.0	432	16	28	40-7/16	5
BSI138	5	138	113	354	85	82.0	504	19-1/4	28	40-7/16	6
BSI172	6	172	142	446	107	82.1	589	22-1/2	28	40-7/16	6
BSI207	7	207	171	533	128	82.1	669	25-3/4	30	40-7/16	7
BSI241†	8	241	199	621	149	82.2	745	29	30	40-7/16	7
BSI276†	9	276	229	708	172	82.2	826	32-1/4	30	40-7/16	8
BSI311* [‡]	10	310	240	790	180	77.5**	957	35-1/2	30	45-7/16	8
BSI346* [‡]	11	345	267	879	200	77.5**	1044	38-3/4	30	45-7/16	9
BSI380* [‡]	12	379	294	966	221	77.5**	1125	42	30	45-7/16	9

1. USA - For altitudes above 2,000 ft. ratings should be reduced at the rate of 4% for each 1,000 ft above sea level.

†Available as semi-packaged boiler

*Not available for elevations above 2,000 ft. or for use with LP gas

**Thermal efficiency

All residential cast iron steam boilers include a full one-year warranty. A 12-year limited warranty is provided for the heat exchanger. A 5-year and a 10-year extended warranty covering parts and labor are also available. Visit VelocityBoilerWorks.com or see your warranty for complete details.



The Mega-Stor II[®] indirect water heater utilizes the energy created by your boiler to produce abundant hot water for your home. Mega-Stor II water heaters come in a variety of sizes from 26 to 119 gallons to meet a multitude of residential and commercial needs.

Specifications are subject to change without notice.

ADDITIONAL FEATURES/BENEFITS

- Available with natural or LP gas
- Probe low water cut-off standard; option of float low water cut-off
- Isolation relay simplifies thermostat wiring
- Redundant gas valve
- Roll-out switch; blocked vent switch
- Glass water level gauge set

