



BERMUDA

Caldera de vapor de gas

Diseñada para confiabilidad, eficiencia y rendimiento. Para aplicaciones residenciales y comerciales pequeñas con chimenea aprobada.



Los kits BSI Near Boiler Piping están diseñados para ahorrar tiempo y dinero. El kit de tubería próxima a la caldera le permite suministrar vapor "seco" al sistema de calefacción, reducir los ciclos cortos, eliminar el golpe de ariete y proteger contra la inundación del sistema. El kit incluye todos los componentes para llevar a cabo la conexión próxima a la caldera como se recomienda en el manual de instalación.




- Intercambiador de calor de hierro colado
- Quemadores de acero inoxidable
- Desviador trasero integrado p/espacios peq.
- Con amortiguador de ventilación automático
Modelos BSI069 a BSI276
- Carcasa atractiva y resistente
- Totalmente ensamblado o disponible desmontado
- Diez tamaños de 69 a 379 MBH
- Diseñado para instalación en pisos combustibles

Quality
Value &
Service

BSI SERIES - BERMUDA

TECHNICAL SPECIFICATIONS

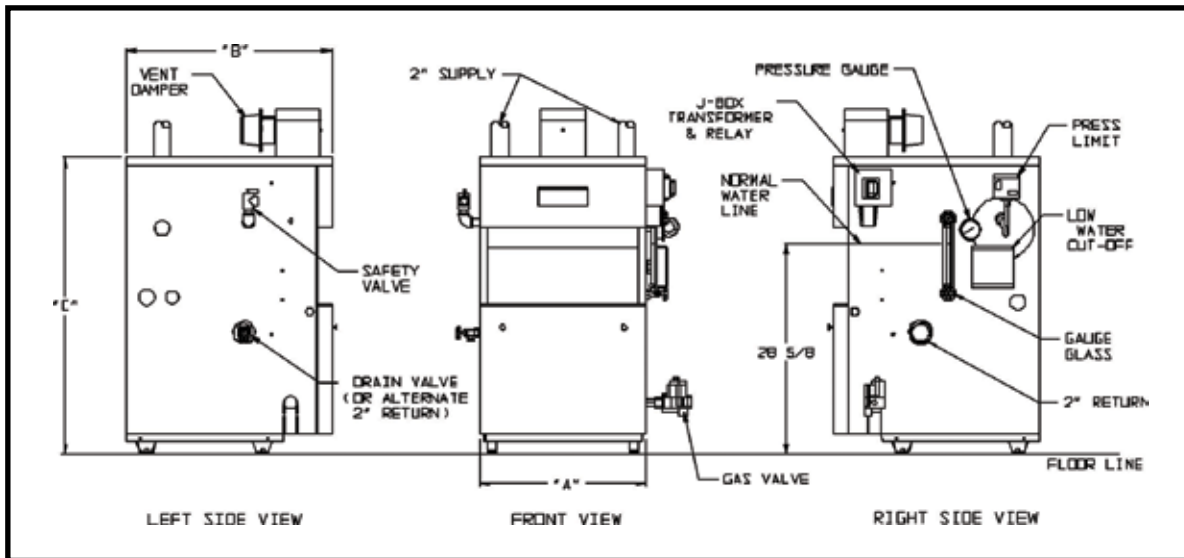

CROWN MODEL NUMBER	NO. OF SECS	NATURAL OR LP GAS				AFUE %	APPROX. SHIPPING WEIGHT (PKG)	DIMENSIONS (INCHES)			
		INPUT (MBH)	HEATING CAPACITY (MBH)	AHRI NET RATING (STEAM)				A	B	C	FLUE COLLAR DIAMETER
				SQ. FT.	MBH						
BSI069	3	69	57	179	43	81.9	354	12-3/4	28	40-7/16	4
BSI103	4	103	85	267	64	82.0	432	16	28	40-7/16	5
BSI138	5	138	113	354	85	82.0	504	19-1/4	28	40-7/16	6
BSI172	6	172	142	446	107	82.1	589	22-1/2	28	40-7/16	6
BSI207	7	207	171	533	128	82.1	669	25-3/4	30	40-7/16	7
BSI241†	8	241	199	621	149	82.2	745	29	30	40-7/16	7
BSI276†	9	276	229	708	172	82.2	826	32-1/4	30	40-7/16	8
BSI311*‡	10	310	240	790	180	77.5**	957	35-1/2	30	45-7/16	8
BSI346*‡	11	345	267	879	200	77.5**	1044	38-3/4	30	45-7/16	9
BSI380*‡	12	379	294	966	221	77.5**	1125	42	30	45-7/16	9

1. USA - For altitudes above 2,000 ft. ratings should be reduced at the rate of 4% for each 1,000 ft above sea level.

†Available as semi-packaged boiler

*Not available for elevations above 2,000 ft. or for use with LP gas

**Thermal efficiency

All residential cast iron steam boilers include a full one-year warranty. A 12-year limited warranty is provided for the heat exchanger. A 5-year and a 10-year extended warranty covering parts and labor are also available. Visit VelocityBoilerWorks.com or see your warranty for complete details.



The Mega-Stor II[®] indirect water heater utilizes the energy created by your boiler to produce abundant hot water for your home. Mega-Stor II water heaters come in a variety of sizes from 26 to 119 gallons to meet a multitude of residential and commercial needs.

Specifications are subject to change without notice.

ADDITIONAL FEATURES/BENEFITS

- Available with natural or LP gas
- Probe low water cut-off standard; option of float low water cut-off
- Isolation relay simplifies thermostat wiring
- Redundant gas valve
- Roll-out switch; blocked vent switch
- Glass water level gauge set

