

PPs FLEX VENT

CHIMNEY VENT SYSTEM FOR BWC SERIES BOILERS



PPs Flex Vent Features

- ✓ DESIGNED FOR USE IN A SINGLE FLUE MASONRY CHIMNEY
- ✓ ALLOWS AIR TO FLOW DOWN CHIMNEY, WHILE PUSHING EXHAUST GAS OUT THROUGH A CORRUGATED, FLEXIBLE POLYPROPYLENE CHIMNEY LINER
- ✓ IDEAL FOR WHEN SIDE WALL VENTING IS NOT PRACTICAL
- ✓ COST EFFECTIVE, SIMPLE, QUICK INSTALLATION
- ✓ ELIMINATES THE NEED FOR UNSIGHTLY PVC PIPE




*An elegant, efficient concentric venting system
for Bimini high efficiency boilers*



PPs FLEX VENT TECHNICAL INFORMATION

Basic PPs Flex Vent System

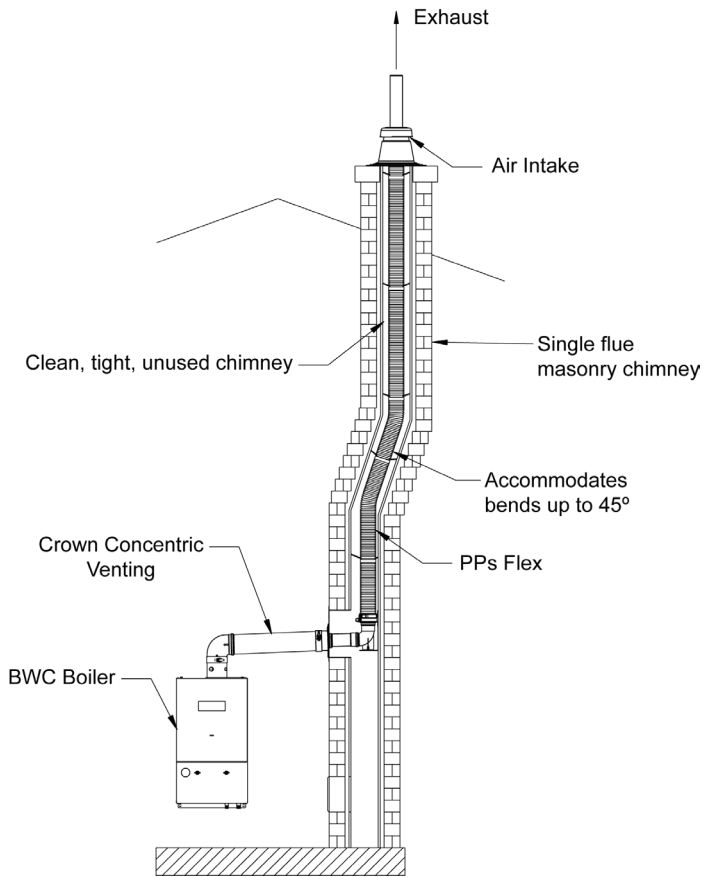

Crown Concentric Vent Cap



Summary of PPs Flex Venting Options

Boiler Model	BWC070	BWC090	BWC120	BWC151	BWC150	BWC225	BWC300
Max Chase Height (Feet)	32	32	32	32	32	32	32
Max Total Vent Length (Feet)	51	51	51	51	47	45	68
PPs Liner Size (Millimeters)	80	80	80	80	80	100	100
Min Chase ID (Round)	6" Dia	6" Dia	6" Dia	6" Dia	6" Dia	7" Dia	7" Dia
Min Chase ID (Rectangular)	6" x 6"	6" x 6"	6" x 6"	6" x 6"	6" x 6"	7" x 7"	7" x 7"

*Please consult the installation manual for specific chimney and PPs vent system requirements.

*Certified to Ulc S636



CrownBoiler.com
PHILADELPHIA, PA